



Instruction


Perspective View

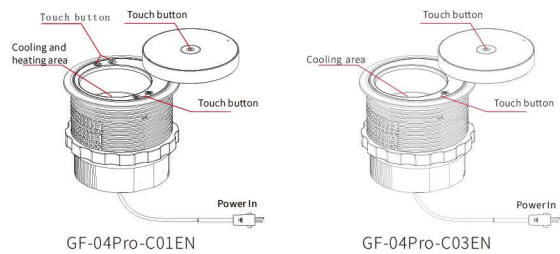

Top view

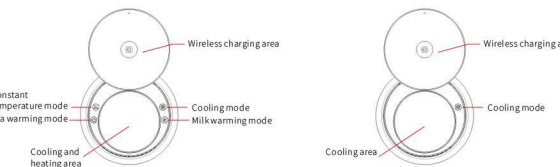


Front view

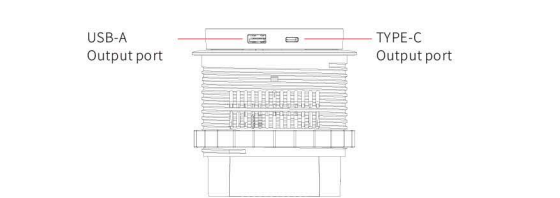


Fixation for Installation

1. The maximum outer diameter of product is 100.5mm, and the bottom depth is 97.8mm. Furniture surface hole size is recommended $\phi 103\text{mm}$, and a reasonable gap is reserved at the bottom to facilitate the heat dissipation of product, as shown in the figure below:



2. Put the product into the drilled round hole, and tighten the fixing ring at the bottom, as shown in the figure below:

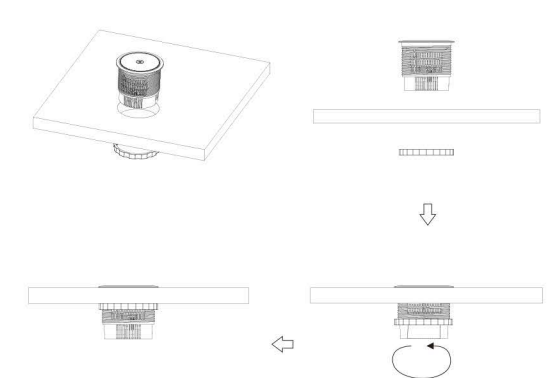

Operation Instructions


Definition of movement module buttons and indicator lights

Button form	Touch button				
State	Initial state		Raising state		Screw-out state
Button action	Click	Double-click	Click	Double-click	Double-click
Movement	Raise	Raise and rotate rightwards	Descend	Rotate rightwards	Rotate leftwards
Indicator	Blue	Green	Blue	Green	Green

Definition of buttons and indicator lights of heating and cooling modules

Button form/action	Touch button/click			
Icon				
Mode	Constant temperature	Tea warming	Cooling	Milk warming
Indicator	Red	Orange	Blue	Yellow

Note:
The heating and cooling functions can only be enabled after the product is screwed out, please make sure that the product has been fully screwed out and entered the following state. If the product is manually toggled or not rotated properly, the heating and cooling functions may not be available;
Operation instructions for heating and cooling:
Put the liquid into the heating and cooling cup, put the cup into the cup holder, and then select the corresponding function.
The heating and cooling functions will be automatically turned off after three hours of operation.

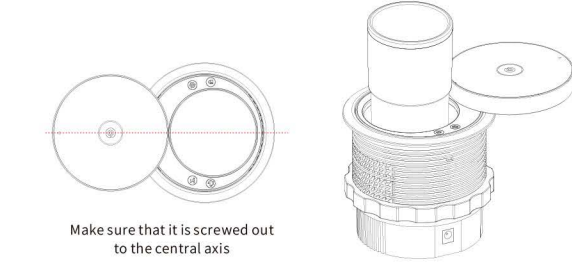

Specifications

Product name		Embedded intelligent multi-functional charger	
Model		GF-04 PRO-C01EN	GF-04 PRO-C03EN
Input		DC 24V-32V	
Wireless charger	Output	15W Max, compatible with 10W/7.5W/5W	
	Transmission distance	3-8mm(coil-coil)	
Output of Type-C		30W Max	
Output of USB-A		18W Max	
Heating and cooling function	Power	33W	
	Cup capacity	350ML	
	Constant temperature mode	50°C-55°C	/
	Cooling mode	5°C-15°C	5°C-15°C
	Tea warming mode	30°C-35°C	/
	Milk warming mode	40°C-45°C	/
Protection		Overcurrent, overvoltage, short circuit, FOD	
Dimensions		$\phi 115\text{mm} \times 101.5\text{mm}$	

your body.


This form is in term of Stipulation SJ/T 11364

☐ O It means that the content of the harmful substance in a part of the part is lower than the limit requirements specified in GB/T 26572.

☐ X It means that the content of the harmful substance in a part of the part exceeds the limit requirements specified in GB/T 26572.



Tap once to raise cup holder top
Tap once to descend cup holder top

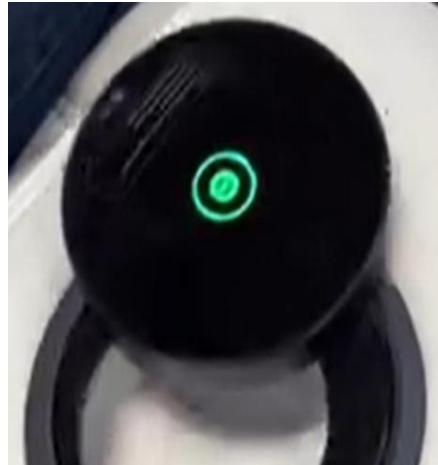

Double tap to open cup holder
Double tap to close cup holder



Tap icon once for Constant
Temperature 50-55°C ●



Tap icon once for
WARMING 40-45°C ●



Tap icon once for
HOT drinks 30-35°C ●



Tap icon once for
COLD drinks 5-15°C ●